

WEATHERSmart[®]

COMMERCIAL

Tough Enough for Commercial, Smarter Than the Weather

Fortifiber Building Systems Group[®] raises the bar again with the introduction of WeatherSmart Commercial, the first commercial weather barrier to build upon the advanced building science of

WeatherSmart housewrap.

WeatherSmart Commercial

delivers a water

resistance that outperforms virtually all other commercial grade wraps, while delivering tear resistance that is up to three times that of competing products.

“*WeatherSmart Commercial's water resistance is unmatched by any commercial grade wrap...*”

WeatherSmart Commercial represents the next generation in weather barrier technology, offering architects, specifiers and builders a smart solution that delivers the ideal balance between breathability and water protection, so it can be used in any climate and behind most exterior claddings.



The WeatherSmart Commercial design has its roots in advanced building science research. The product is a nonwoven, non-perforated wrap, employing an advanced breathable polymer technology. Its design provides a highly reliable air infiltration barrier that is incredibly durable and UV stable for up to 12 months of jobsite exposure. So it's right at home in the most rugged conditions.

Unlike other weather barriers, WeatherSmart Commercial is highly resistant to surfactants that can severely reduce water resistance. Surfactants are chemicals that make it easier for water to pass through small holes. Exposure to these chemicals on the jobsite and by building owners in the form of power washing solutions and detergents is quite common, so you can count on WeatherSmart Commercial to continue providing protection long after the exterior cladding is installed.

The product is part of a complete Moisture Control System for walls engineered by the Fortifiber Building Systems Group, which has been chosen by builders and architects to protect over five million homes and commercial buildings from the problems caused by water intrusion. When integrated into the building envelope, our products help manage and eliminate moisture-related problems – including water-related structural failures, mold and mildew.

Decades of Proven Performance

WeatherSmart Commercial is a product manufactured by the Fortifiber Building Systems Group. With more than a seventy-year history of proven performance, technical expertise and practical know-how, the company has become a trusted partner to builders, architects and code officials.

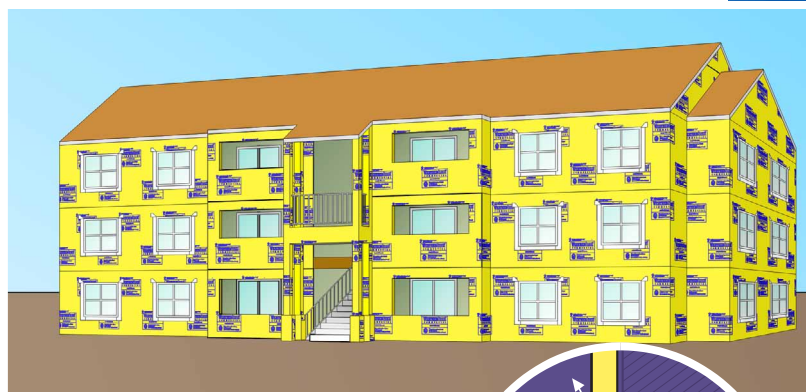

WeatherSmart Commercial protects against water intrusion and air infiltration from the outside, while allowing moisture vapor to escape from the inside.

- EXCEEDS WATER RESISTANCE STANDARDS
- MEETS BUILDING SCIENCE RECOMMENDATIONS FOR BREATHABILITY
- OUTSTANDING UV RESISTANCE
- WITHSTANDS THE RIGORS OF THE JOBSITE
- EXCEEDS STRICT CANADIAN AIR INFILTRATION STANDARDS
- DURABLE TEAR RESISTANCE



Product Description: WeatherSmart Commercial is an advanced commercial-grade weather barrier designed for use within a variety of exterior wall assemblies. It provides outstanding protection from wall damage due to water intrusion and condensation.

Composition: WeatherSmart Commercial is a nonwoven, non-perforated wrap, employing an advanced breathable polymer technology.

Size & Weight: WeatherSmart is available in 10'x125' and 5'x200' rolls. Product weight is approximately 3.27 lbs/100 sq. ft. Thickness is 25 mils.

Applicable Standards: Complies with the International Code Council Evaluation Services Acceptance Criteria for Water Resistive Barriers (AC 38).

Complies as an alternative to the water-resistive barrier specified in Section 1404.2 of the International Building Code®.

Complies as an alternative to the weather-resistant sheathing papers specified in Section R703.2 of the International Residential Building Code®.

ICC-ES Evaluation Report No. 3515.

AATCC-127 (American Association of Textile Chemists and Colorists) Method 127 Water Resistance: Hydrostatic Pressure Test

American Society for Testing & Materials (ASTM):

- *ASTM D-779 - Standard Test Method for Water Resistance of Paper, Paperboard, and Other Sheet Materials by the Dry Indicator Method*
- *ASTM D-4533 - 11 Standard Test Method for Trapezoid Tearing Strength of Geotextiles*
- *ASTM D-5034 - Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test)*
- *ASTM E-84 - Standard Test Method for Surface Burning Characteristics of Building Materials*
- *ASTM E-96 - Standard Test Method for Water Vapor Transmission of Materials*
- *ASTM E-2178 - Standard Test Method for Air Permeance of Building Materials*

Physical Properties: WeatherSmart Commercial is continually tested in accordance with ASTM procedures. The values shown in Table 1 are averages obtained in these tests.

Limitations: Product should be covered within 12 months. To ensure maximum exposure time, store unused product in an area not exposed to sunlight. Inspect product to insure it is free of any protrusions or damage which may detract from the weather-resistive barrier integrity. Holes, tears or punctures should be sealed with Moistop® Sealant or Fortifiber Commercial Tape. This product is not recommended for horizontal, roofing or below grade applications. Fortifiber strongly recommends the use of a Two-Ply Jumbo Tex product or two layers of a single ply Jumbo Tex product when used with a three-coat stucco system. Ensure that a layer of Super Jumbo Tex 60 minute is used to separate WeatherSmart Commercial and Portland cement stucco or mortar used in masonry veneer walls.

Installation: WeatherSmart Commercial should be installed in accordance with the local applicable building code. Weather-resistive barriers should be applied horizontally, with the upper layers overlapping the lower layer by a minimum of 6", and all vertical joints should be lapped a minimum of 6". It is recommended to tape all vertical seams with Fortifiber Sheathing Tape; all seams must be taped to achieve an air barrier install; consult your design professional where necessary.

Availability: The Fortifiber Building Systems Group's products are distributed nationwide. For product information and pricing, please call a Fortifiber distributor near you. If you need assistance locating a participating distributor, please call our Customer Service Department at 1-800-773-4777.

Fortifiber Warranty: Fortifiber Corporation warrants that its products are in compliance with their published specifications and are free from defects in materials and workmanship for a period of two years from the date of purchase. This warranty does not apply to loss due to abuse. Material found to be defective will be replaced at no charge by Fortifiber, but in no event shall Fortifiber be liable for any other costs or damages, including any labor costs.

THIS EXPRESS WARRANTY IS GIVEN IN LIEU OF AND EXCLUDES ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Fortifiber's sole obligations under this warranty are as set forth herein. In no event shall Fortifiber be liable for any lost revenue or profits, direct, indirect, special, incidental or consequential damages of any kind.

This product may be eligible for Fortifiber's FortiShield 10 year warranty when used in conjunction with other Fortifiber products. Please see our website at www.fortifiber.com/warranty.htm for details.

Table 1 - Physical Properties

CHARACTERISTIC	TEST METHOD	RESULTS	INDUSTRY STANDARD
Moisture Vapor Transmission	ASTM E-96 Procedure A (Dry Cup)	98 g/sm/day (14 perms)	35 g/sm/day (minimum)
Air Permeance at 75 Pascals	ASTM E-2178	0.003 L/s/sqM	<0.02 L/s/sqM
Dry Breaking Force	ASTM D-5034 (Grab Test)	MD - 78 lb _f CD - 74 lb _f	MD - 40 lb _f CD - 35 lb _f
Trapezoidal Tear	ASTM D-4533	MD - 33 lb _f CD - 34 lb _f	n/a
Water Resistance "Boat Test" Hydrostatic Head	ASTM D779 AATCC 127	>60 min 1266 cm	10 min (minimum) 55 cm for 5 hours
Flame Spread	ASTM E84	Class A	Class A
Smoke Developed	ASTM E84	Pass	0-25 0-450

SPECIFICATION SUMMARY: Provides secondary weather protection behind exterior cladding to prevent moisture penetration and condensation in exterior wall assemblies.

WEATHER-RESISTIVE BARRIER: WeatherSmart Commercial is a nonwoven, non-perforated wrap, employing an advanced breathable polymer technology.

REFERENCE SPECIFICATION: International Code Council Evaluation Services Acceptance Criteria for Water Resistive Barriers (AC 38)



Fortifiber Building Systems Group®
Protecting Your World from the Elements®

Call 1-800-773-4777 or 1-775-333-6400 for sales and technical assistance. On the Internet visit www.fortifiber.com.