



- 25 year warranty
- Custom styles available
- Made from cellular PVC
- Installation kit included
- Interior and exterior use
- Weather proof
- Insect proof
- Low maintenance



12" PermaWrap® Column, with Tuscan Base and Custom Cap

Custom PermaWrap® Columns

From 5" to 24" width and 2' to 20' height, you can now order the perfect custom column for your home or neighborhood project. Custom columns are manufactured using 3/8", 1/2" or 5/8" cellular PVC. Ask HB&G today how you can put a unique signature on your next custom project. Simply visit our website, www.hbgcolumns.com, or contact our Architectural Department at 1-800-264-4HBG.

Two Ways to Order PermaWrap® Columns



Assembled

"L"-Assembly

Assembled

- Manufactured from Cellular PVC
- Fully Assembled (with or without post)
- Ready to Install

L-Assembly

- Manufactured from 3/8", 1/2" or 5/8" Cellular PVC
- Shipped in two "L" shaped halves
- Square Column Ready to Wrap Around an Existing Post
- Available in Plain, Fluted, Raised Panel, Recessed Panel
- Craftsman Columns Available in Plain, Raised and Recessed Panel Styles



24" x 18' Square Recessed PermaWrap® Columns



10" x 8' Custom Raised Panel Square PermaWrap® Columns and Custom Rail Design



14" x 10' Custom Raised Panel PermaWrap® Columns




16" x 6' Craftsman PermaWrap® Column with Pedestal


Leading the industry in column innovation, HB&G PermaWrap® columns are made from cellular PVC and offer advantages of being unaffected by moisture and insects, but with the thickness, ease of use and workability of wood.

PermaWrap® Columns are available in all sizes and styles — square or craftsman — plain, fluted, raised panel, and recessed panel. With all of these options, you are certain to find just the right amount of detail for your specific project.

Best of all, the PermaWrap® column comes with a 25-year HB&G warranty.

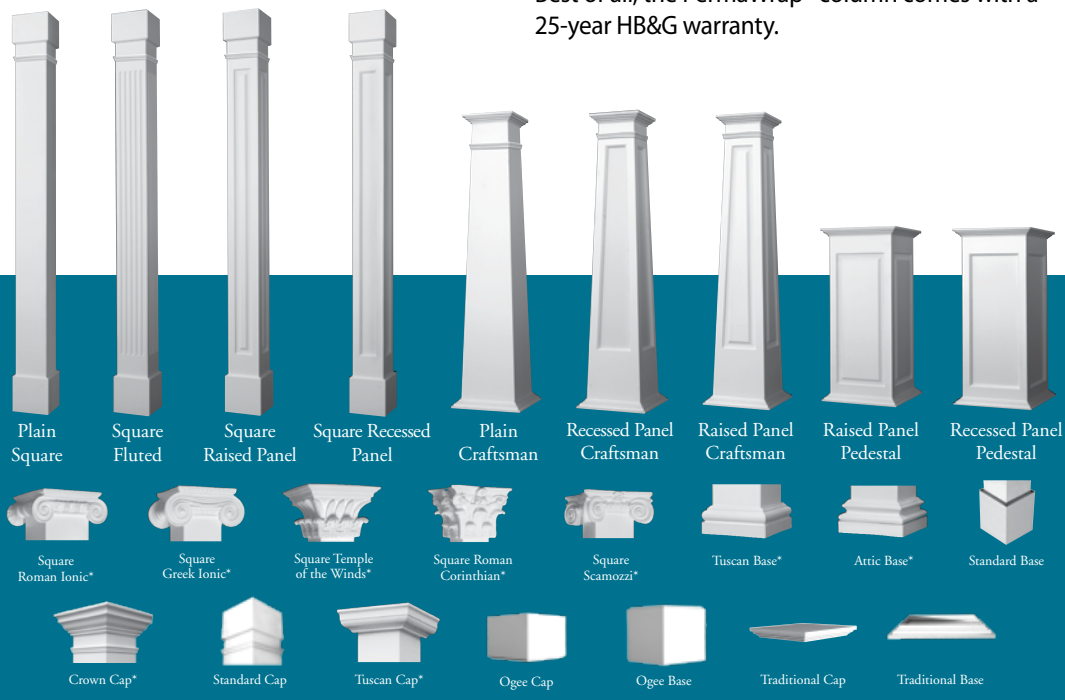

**Made from polyurethane and may need to be split in the field for installation.*

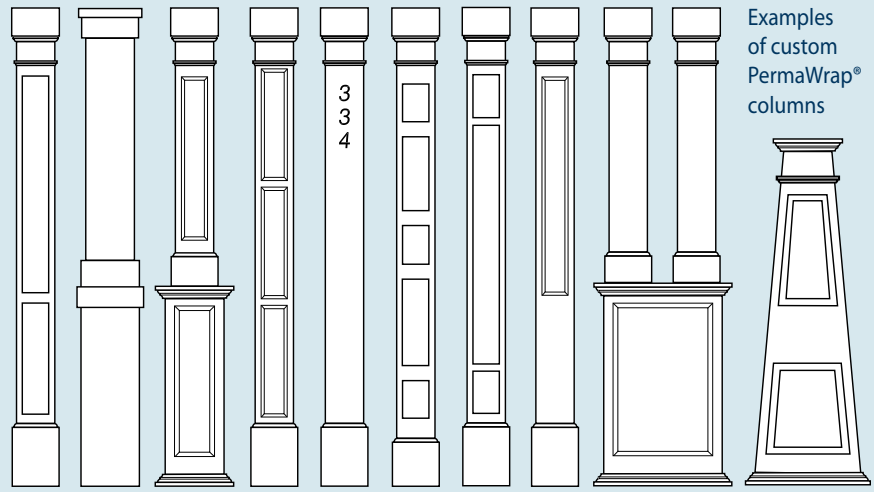

Warranty Info

Subject to the terms, conditions and limitations stated herein, HB&G Building Products, Inc., warrants to the original purchaser that PermaWrap® columns will be free from manufacturing defects which cause the product to rot, delaminate or excessively swell during the applicable warranty period. This warranty shall be effective for a period of 25 years from date of original purchase.

This warranty does not cover painted finish or coating applied to PermaWrap® columns by the original purchaser or any third party. Failure to adhere to manufacturer's recommended guidelines for application of painted surfaces shall void this warranty. This warranty does not cover improper installation of PermaWrap® columns or its structural supports. In the event of a claim against this warranty, proof of purchase, with date will be required to affect such a claim.



Installation cost not included. HB&G Building Products, Inc. gives no other warranty expressed or implied. For complete warranty visit www.hbgcolumns.com.

PLAIN PERMAWRAP® DIMENSIONS (IN INCHES)

	Col Width	A	C	G	L	R	U	Lengths
Assembled	6"	5 ⁷ / ₈ "	6 ³ / ₈ "	1"	6 ⁵ / ₈ "	12"	6"	8', 10'
	8"	7 ⁷ / ₈ "	8 ³ / ₈ "	1"	8 ⁵ / ₈ "	12"	6"	8', 10', 12'
	10"	9 ⁷ / ₈ "	10 ⁵ / ₈ "	1"	10 ⁵ / ₈ "	12"	6"	8', 10', 12'
	12"	11 ⁷ / ₈ "	12 ⁵ / ₈ "	1"	12 ⁵ / ₈ "	12"	6"	8', 10', 12'
L Assembly	6"	5 ⁷ / ₈ "	6 ³ / ₈ "	1"	6 ⁵ / ₈ "	12"	6"	8', 10'
	8"	7 ⁷ / ₈ "	8 ³ / ₈ "	1"	8 ⁵ / ₈ "	12"	6"	8', 10', 12'
	10"	9 ⁷ / ₈ "	10 ⁵ / ₈ "	1"	10 ⁵ / ₈ "	12"	6"	8', 10', 12'
	12"	11 ⁷ / ₈ "	12 ⁵ / ₈ "	1"	12 ⁵ / ₈ "	12"	6"	8', 10', 12'

INSIDE DIMENSIONS

6"	4 ⁵ / ₈ "
8"	6 ⁵ / ₈ "
10"	8 ⁵ / ₈ "
12"	10 ⁵ / ₈ "



Additional sizes are available from 5" to 24" width and 2' to 20' height

PERMAWRAP® FLUTED, RECESSED PANEL AND RAISED PANEL DIMENSIONS (IN INCHES)

Col Width	A	C	G	L	N	O	S*	R	U	Lengths
6"	5 ⁷ / ₈ "	7 ¹ / ₈ "	1 ¹ / ₈ "	7 ¹ / ₈ "	6"	6"	1 ³ / ₄ "	9"	7"	6', 8', 9', 10'
8"	7 ⁷ / ₈ "	9 ¹ / ₈ "	1 ¹ / ₈ "	9 ¹ / ₈ "	6"	6"	1 ³ / ₄ "	9"	7"	6', 8', 9', 10', 12'
10"	9 ⁷ / ₈ "	11 ¹ / ₈ "	1 ¹ / ₈ "	11 ¹ / ₈ "	6"	6"	1 ³ / ₄ "	9"	7"	6', 8', 9', 10', 12'
12"	11 ⁷ / ₈ "	13 ¹ / ₈ "	1 ¹ / ₈ "	13 ¹ / ₈ "	6"	6"	1 ³ / ₄ "	9"	7"	6', 8', 9', 10', 12'

Rail breaks are 7" long, and designed to fit 36" or 42" rail heights.

*S dimension for 6" raised panel is 1-1/4", 8" raised panel is 1-1/2".

S dimension for fluted columns vary.



Additional sizes are available from 5" to 24" width and 2' to 20' height

INSIDE DIMENSIONS

6"	3 ⁷ / ₈ "
8"	5 ⁷ / ₈ "
10"	7 ⁷ / ₈ "
12"	9 ⁷ / ₈ "

NUMBER OF FLUTES PER SIDE

6"	3
8"	5
10"	7
12"	8

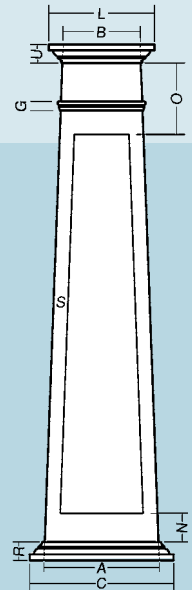



PERMAWRAP® CRAFTSMAN DIMENSIONS (IN INCHES)

Col Width	A	B	C	G	L	N	O	S	R	U	Lengths
12"X8"	11 ⁷ / ₈ "	7 ⁷ / ₈ "	14 ⁷ / ₈ "	1 ¹ / ₈ "	10 ⁷ / ₈ "	6"	6"	1 ³ / ₄ "	2"	2"	54", 60", 66", 72", 96"
16"X10"	15 ⁷ / ₈ "	9 ⁷ / ₈ "	18 ⁷ / ₈ "	1 ¹ / ₈ "	12 ⁷ / ₈ "	6"	6"	1 ³ / ₄ "	2"	2"	54", 60", 66", 72", 96"
20"X15"	19 ⁷ / ₈ "	14 ⁷ / ₈ "	22 ⁷ / ₈ "	1 ¹ / ₈ "	17 ⁷ / ₈ "	6"	6"	1 ³ / ₄ "	2"	2"	54", 60", 66", 72", 96"

Additional sizes are available from 5" to 24" width and 2' to 20' height

INSIDE DIMENSIONS

	Bottom	Top
12" x 8"	10 ⁵ / ₈ "	5 ⁷ / ₈ "
16" x 10"	14 ⁵ / ₈ "	6 ⁷ / ₈ "
20" x 15"	18 ⁵ / ₈ "	12 ⁷ / ₈ "

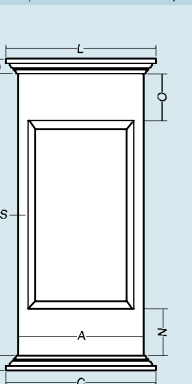





PERMAWRAP® PEDESTAL DIMENSIONS (IN INCHES)

Col Width	A	C	L	N	O	S	R	U	Lengths
16"	15 ⁷ / ₈ "	18 ⁷ / ₈ "	18 ⁷ / ₈ "	6"	6"	1 ³ / ₄ "	2"	2"	40", 46"
20"	19 ⁷ / ₈ "	22 ⁷ / ₈ "	22 ⁷ / ₈ "	6"	6"	1 ³ / ₄ "	2"	2"	40", 46"
24"	23 ⁷ / ₈ "	26 ⁷ / ₈ "	26 ⁷ / ₈ "	6"	6"	1 ³ / ₄ "	2"	2"	40", 46"

Additional sizes are available from 5" to 24" width and 2' to 20' height

INSIDE DIMENSIONS

16"	13 ⁷ / ₈ "
20"	15 ⁷ / ₈ "
24"	21 ⁷ / ₈ "

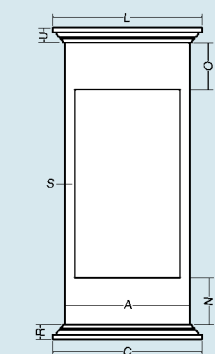

Painting and Finishing

Caulk where required using Siroflex brand Sealant and Adhesive provided by manufacturer. Putty any holes using acrylic putty or caulk. Lightly sand or scuff surface of column. Clean surface of column to remove any dirt or hand oil residue with light detergent and water, denatured alcohol, or window cleaner. Be sure to remove soap residue with clean water. Apply one coat of 100% acrylic exterior primer and one or more finish coats of 100% acrylic exterior paint.

Do not paint columns using dark colors (dark colors are considered any color that falls within the L value of 56 to 0). L is a measure of lightness of an object and ranges from 0 (black) to 100 (white).

See page 16 for Ornamental Capital Dimensions.